

Next & Beyond.
ALUCOBOND®

3A Composites India Pvt. Ltd.
Bldg. No. 11, Unit No. 1112, 1st Floor
Solitaire Corporate Park
Mathuradas Vasanji Marg
Andheri (East)
Mumbai - 400 093, India
Telephone: (91) 22 4256 4500
Telefax: (91) 22 4010 4132
Email: alucobond.india@3acomposites.com
www.alucobond.in

3A Composites Asia Pacific Pte. Ltd.
300 Beach Road
#10-06 The Concourse
Singapore 199555
Telephone: (65) 6303 9750
Telefax: (65) 6303 9751
Email: sales@alucobond.com.sg
www.alucolux.com
www.alucobond.com.sg

3A Composites GmbH
Alusingenplatz 1
78224 Singen
Germany
Telephone: (49) 7731 941 2060
Telefax: (49) 7731 941 2845
Email: info@alucobond.com
www.alucobond.com

3A Composites Middle East (Branch)
Almas Tower, JLT
P.O. Box: 343522
Dubai, UAE
Mobile: (97) 1 58 535 1721
Email: basel.massis@3acomposites.com
www.alucobond.com

3A Composites (China) Ltd.
Room 1902-1903
Hongkong Prosperity Tower
Mengzi Road No. 763
Huangpu Shanghai
China
Telephone: (86) 21 6315 8550
Email: alucobond.china@3acomposites.com
www.alucobond.com.cn

3A Composites USA
721 Jetton Street, Suite 325
Davidson, NC 28036
United States of America
Tel: (1) 800 626 3365
Email: info.usa@3acomposites.com
www.alucobondusa.com



ALUCOBOND®

ANODIZED LOOK

The natural beauty of satin-smooth metal



SOPHISTICATED AND TIMELESS

ALUCOBOND® anodized look series presents a sophisticated and contemporary satin-smooth aluminium composite material that is globally admired by architects and designers. Since it is coated with top-grade Fluorocarbon Lacquer system, it ensures long term performance. Hence ALUCOBOND® anodized look is a preferred alternative over real anodizing. It is used for rainscreen facades, wall cladding, roof perimeter detailing, curved features, column casings and various other interior and exterior architectural applications. Crafted to meet EURAS industrial standards, it seamlessly complements anodized elements like window frames and doors, ensuring a beautifully integrated appearance.

GENERAL INFORMATION

ALUCOBOND® features a multi-coat, multi-bake process on a continuous coil coating line using the highest grade of PVDF/FEVE paint system. The multiple layers are individually cured at temperatures of between 200-260°C. The quality of the coating is tested according to standards established by E.C.C.A. (European Coil Coating Association) of which 3A Composites is a member. Fluorocarbon (PVDF/FEVE) coating systems combine good formability and excellent surface durability. They are extremely resistant to weathering, strong solar radiation and pollution.

The standard gloss for colours is between 30% - 40% according to Gardner Scale.

The ALUCOBOND® anodized look panels can be creatively shaped and transformed into diverse design concepts using standard processing methods, making them highly desirable for architects and designers.


ALUCOBOND® anodized look strikes a perfect balance between aesthetics and practicality, giving you a dependable choice that emphasizes quality and appearance in architectural projects.

Minimum order quantities apply. For more information please refer to your nearest ALUCOBOND® representative or visit www.alucobond.in

ONLY FOR METALLIC COLOURS


To avoid possible reflection variations, it is recommended to install the panels in the same direction as marked on the protective peel-off-foil. Colour variations may occur between panels originating from different production batches. To ensure colour consistency, the total requirement for a project must be placed in one order.

Make sophistication and class the benchmark of your designs with our satin-smooth range.

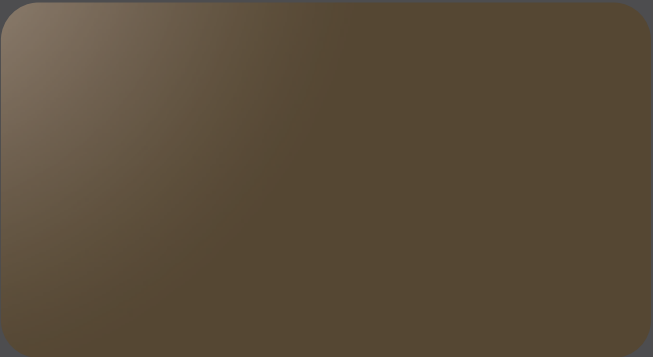


SATIN BROWN

| 538

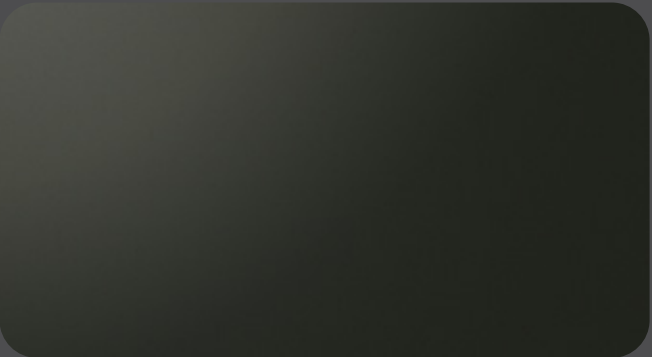


C34

| 534

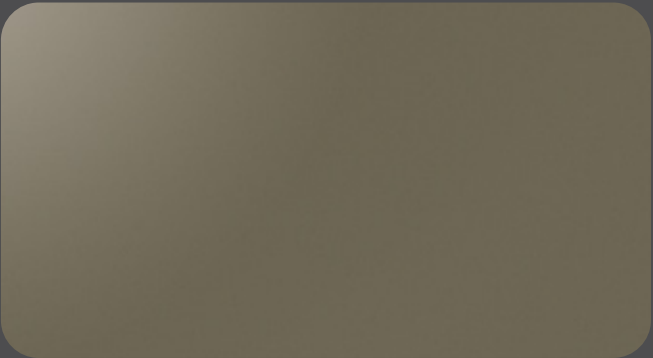


C32

| 532

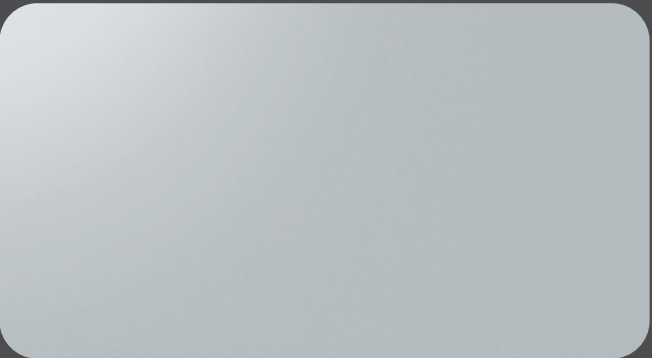

C0/EV1

| 530

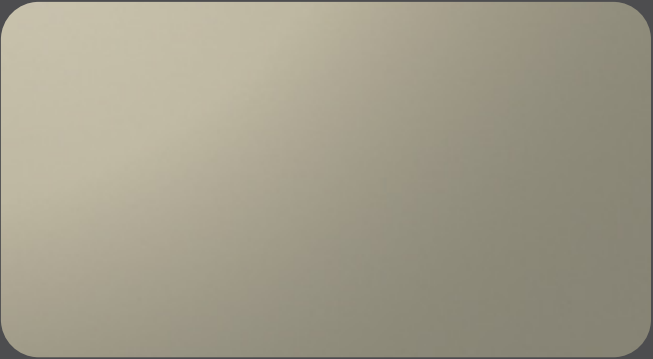

C31

| 531



C2 LIGHT GOLD

| 539

